

EZ-SET 48x40 Series

FITS 48 X 40 PALLET

ECONOMICAL

275 GALLON

**STACKS THREE HIGH
WHEN FILLED**

EASY ASSEMBLY

100% RECYCLABLE

**FOOD GRADE &
ASEPTIC BAG
LINERS AVAILABLE**

**ALL LINERS ARE
DAIRY & KOSHER
CERTIFIED**

**EZ-SET CAN BE
SHIPPED
ASSEMBLED OR
KNOCKED DOWN**



**CALL TODAY
& SAVE**

(800) 342-2855



PAPERSYSTEMS

WWW.PAPER-SYSTEMS.COM

6127 Willowmere Dr. Des Moines, IA 50321



275 gallon EZ-SET 48x40 container system fits on a 48 x 40 pallet. Containers arrive stretch wrapped and flat on skids minimizing warehouse space (up to 80% less than drums). Unit can be stacked three high in a warehouse environment.

Assembly

Take EZ-SET 48x40 body and position squarely onto pallet.
Check all four sides of the container to insure box is centered.



Bag liner

EZ-SET 48x40 comes with a multi layer inner bag liner. All liners are made from FDA approved materials, USDA, food grade, Kosher approve and IMS Dairy certified. Specialty barrier films to meet specific requirements are available.

Filling accomplished through at 2" NPT fitment located at the top center of the liner. The bottom evacuation fitment is located on the side of the liner to be positioned through the evacuation hole of the EZ-SET 48x40 body.

Filling

Take the cassette from the skid stack
Unscrew the filling plug and drop the cassette into the assembled body making sure to hold onto the filling plug.

Attach filling hose and quick connect fittings as needed.

Place liner in assembled EZ-SET 48x40 body so that the bottom drain aligns with the evacuation hold on the bottom side of the body.

Allow 10 gallons to enter liner and then square up bottom of bag liner by gently lifting four corners of the liner so all four corners are squared out against the side walls. Fill the bag to the top of the body side walls.

Disconnect filling line and adapter if used.
Remove any air from liner by pressing down on the top of the liner.
Screw in the filling plug until gasket contact, then go another 1/4 turn.



Pallet

Pallet size 48 x 40 is critical to overall container performance. Standard two-way pallet should meet the following minimum specifications:

Three 2" x 4" standard hardwood or softwood stringers

Ten 1" x 6" deck boards (seven top boards and three bottom boards)


2 1/2" spiral nails

Shipping

Put corrugated lid on box.

Strap box tightly to pallet with two straps in each direction as printed on lid.

Strap spec: .022 3/4" steel or equivalent

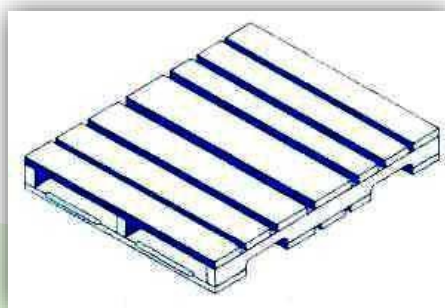

PAPERSYSTEMS

6127 Willowmere Drive, Des Moines, Iowa 50321 USA

Ph. 1-515-280-1111

Fax 1-515-280-9219

www.paper-systems.com

US Patent Applied For

All Other Rights Reserved