
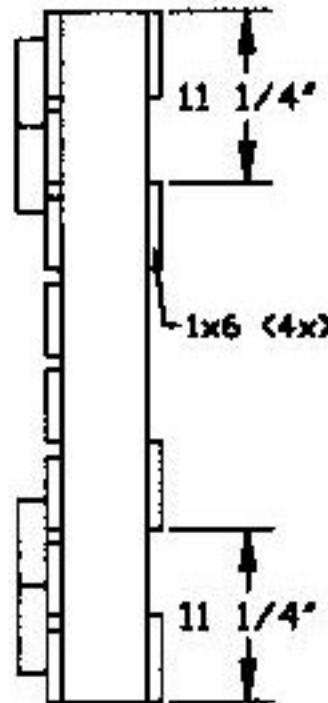


#702105

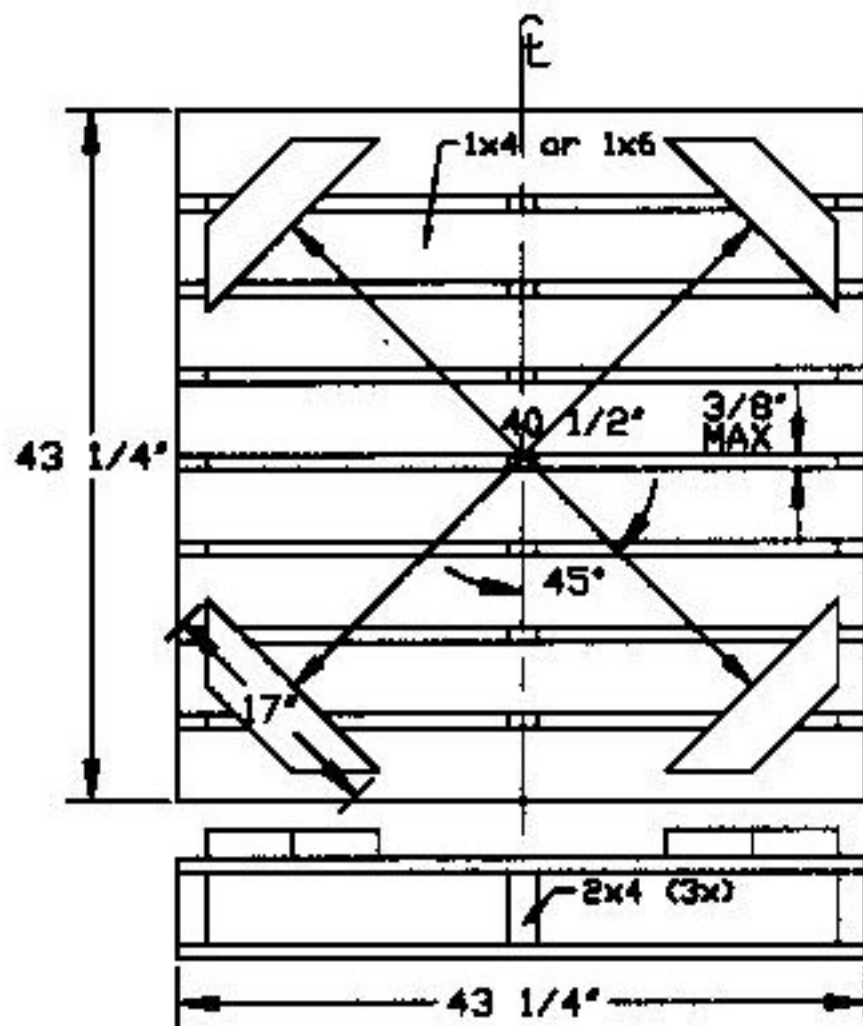

- \* Full top deck of 1x4 or 1x6 by 43 1/4' exac. Minimum length. Top boards with a maximum 3/8' spacing between boards. Minimum length nail (2 1/2')
- \* Full 3/4' material
- \* (3) 2x4x43 1/4' stingers
- \* (4) 1x6x43 1/4' maximum length bottom boards.
- \* (4) 2x4x17' corner cleats installed properly.
- \* Minimum (8) nails per cleat. Nails used in cleat can be 2 1/2' if nailed from both top and bottom side.
- \* Minimum length of nail 2 1/2' Screw nail, glued, required in hardwood. 2 1/2' ring shank nail, glued, required in soft wood. Nails that protrude must be bent over.
- \* Octagonal template furnished for cleat pattern, cleat pattern is 40 1/2' face to face centerd.
- \* Color Code/Painted -- Red

Paper Systems Inc.

43 'EZ-Bulk' 275 Gal.

Revision #702105.A | Eric W.

Scale: 3/4"=1 | July 9, 1998